




## Plugs



### ASS 4-2

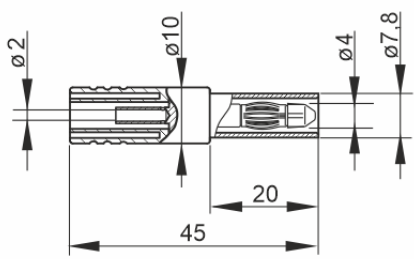

Product	ASS 4-2
description	Touch-protected safety adapter with spring-loaded 4 mm safety plug and rigid 2 mm safety socket for connection of 2 mm safety plugs, 1000 V system, IEC61010.
operating instruction	BA466
article-no. / *colour	9736101xx <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  00 black         </div> <div style="text-align: center;">  01 red         </div> </div>
drawing	
technical data	
connection	unsprung socket 2 mm
rated voltage	AC/DC 1000 V
measurement cat. acc. to IEC 61010	CAT III
rated current (consider derating curve)	10 A
material socket	brass, nickel plated
housing material	PA
temperature range acc. To IEC61010 <sup>(1)</sup>	-15 °C to +70 °C
inflammability class acc. to UL 94 (only valid for basic material of housing)	V-2

4 mm safety system

<sup>(1)</sup> contact the manufacturer for applications at deviating temperature ranges  
stand: 28.11.2024

stand: 28.11.2024